
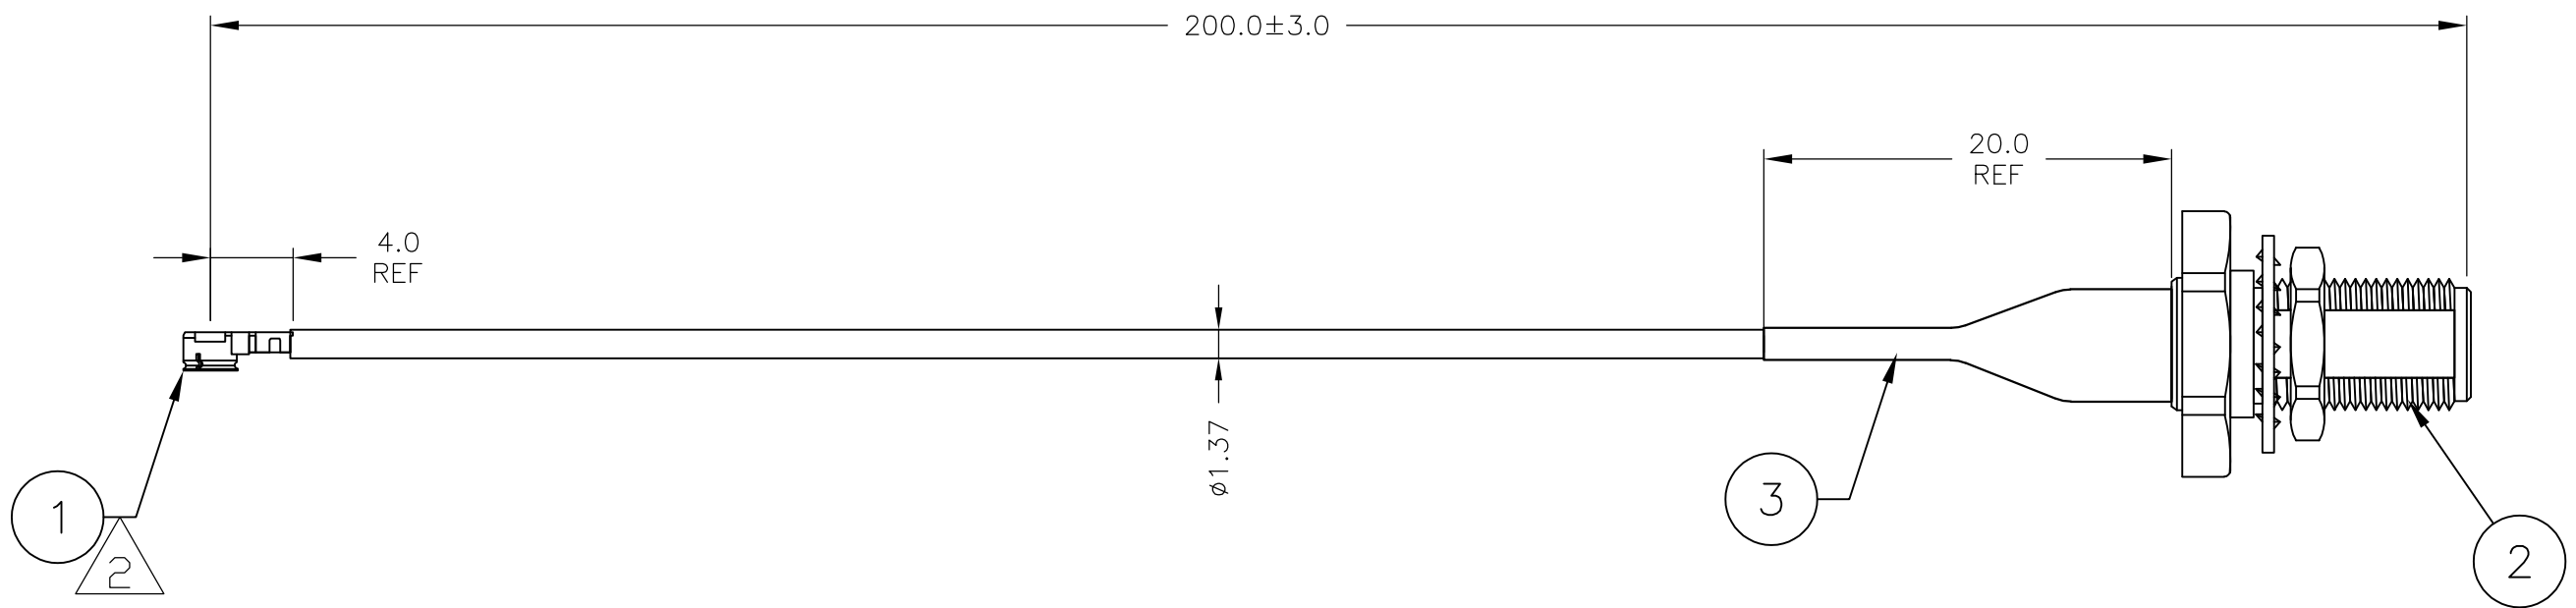


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		A1		REVISED PER ECO-11-005033	23MAR11	RK	HMR

1. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TE CONNECTIVITY STANDARD 230-702.
2. HIROSE COMPATIBLE, 2.5 mm MATING HEIGHT. UMCC CONNECTOR, TYPE III
3. CABLE ASSEMBLY TO BE 100% ELECTRICALLY TESTED FOR OPENS, SHORTS AND CONTINUITY. HI-POT AT 150 VDC FOR 100mS VSWR: 1.5:1 MAX.

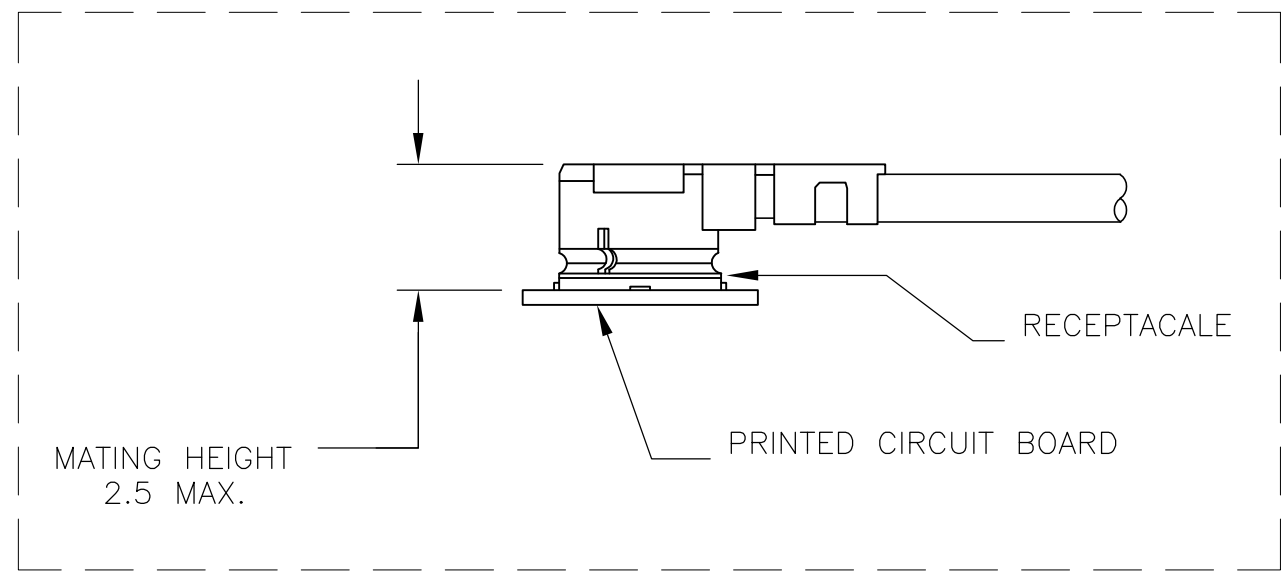

2032440-1
 TE CONNECTIVITY PART NO.

A/R	MR	DESCRIPTION	ITEM
		TUBING, HEAT SHRINK	3
1	PC	SMA, BLKHD, JACK	2
1	PC	UMCC, PLUG [1.37mm CABLE]	1
-1	U/M		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN E.C. CLAYBAUGH 04/DEC/07	TE Connectivity											
DIMENSIONS: mm [INCHES]		CHK J. ORNER 04/DEC/07			NAME CABLE ASSY, RF, UMCC PLUG TO SMA BLKHD JACK [1.37mm CABLE]									
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J. ORNER 04/DEC/07												
<table border="0"> <tr> <td>0 PLC</td><td>± -</td></tr> <tr> <td>1 PLC</td><td>± -</td></tr> <tr> <td>2 PLC</td><td>± -</td></tr> <tr> <td>3 PLC</td><td>± -</td></tr> <tr> <td>4 PLC</td><td>± -</td></tr> <tr> <td>ANGLES</td><td>± -</td></tr> </table>		0 PLC			± -	1 PLC	± -	2 PLC	± -	3 PLC	± -	4 PLC	± -	ANGLES
0 PLC	± -													
1 PLC	± -													
2 PLC	± -													
3 PLC	± -													
4 PLC	± -													
ANGLES	± -													
MATERIAL -	FINISH -	APPLICATION SPEC -	WEIGHT -	SIZE A3	CAGE CODE 00779	DRAWING NO C-2032440	RESTRICTED TO -							
CUSTOMER DRAWING				SCALE N.T.S.	SHEET 1 OF 1	REV A1								